
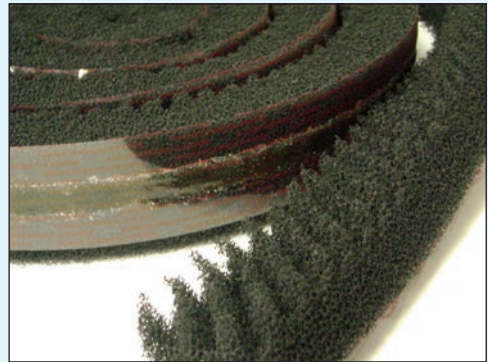


Uni-ventIII-DT[®]

the universal ventilation system

- Standard 1" x 2" x 10' pieces (10/box)
- Stock one product to match any roof panel configuration
- Apply directly to ridge cap
- Pure Polyurethane Foam
- Vinyl Coating
- UV Stabilized/Fire Retardant
- Continuous Glue Strip

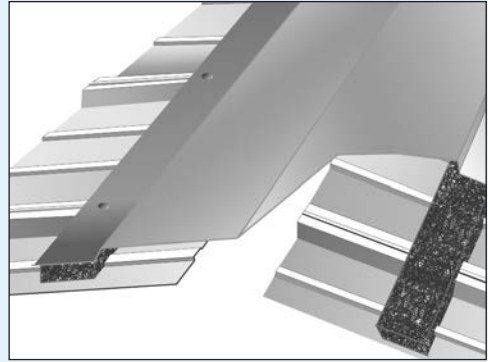

Uni-vent III will conform to virtually any roof panel configuration. It compresses and fills every void between your ridge cap and the roof panel. Factory applied glue strips allow the installer to roll out Uni-vent III and apply it to the ridge cap, even in windy conditions. Then, fasten to vented ridge cap to finish off the installation.


Distributed By:

- Stock one product to match any roof panel configuration
- Use any manufacturers ridge cap
- Use on any roof pitch from 2/12 to 20/12
- Thicker product available for R-Panel and other higher rib configurations
- 40-year product warranty

Physical Properties

Pure Polyurethane Foam
 Vinyl Coating
 UV Stabilized/Fire Retardant
 Continuous Double Glue Strip

Available in
100' packages
(10 - 10' rolls per box)

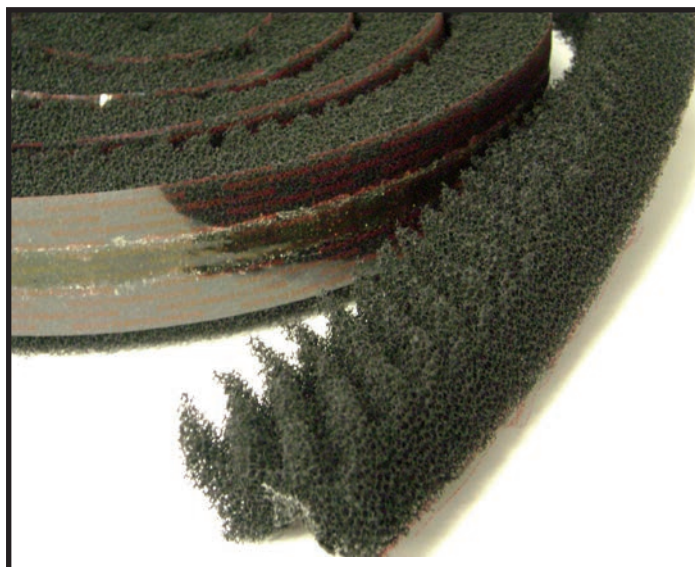

Independent Testing

PROPERTY	TEST	RESULTS
100 mph Wind Driven Rain	CRL 6875	No Leakage
Net Free Area	1" nom. Thickness	8.5 sq. in. per lin. Ft. per side (17 sq. in. per lin. Ft. ridge)
Air Permeability	ASTM D737	840 cu. ft. / min.
Cold Crack	F87260 Sec. 4-C14	Resistance to -55° C
Snow Infiltration	CRL 5704	-0-
Tear Strength	ASTM D3574	3.5 p.p.i.
Tensile Strength	ASTM D3574	16 p.s.i. - Elong 175%
Attic Dust	ASTM D1739-98	No Clogging
Dust Exposure	ICBO AC132	No Clogging
Compressive Strength	ASTM D3574	1.8 p.s.i. @ 75%
UV Stable	Chamber Test	No change to color or materials
Abrasion	ASTM D1175	No damage